


The Minispir Light is a cost-effective spirometer, designed for software-based medical solutions. Real-Time COPD and Asthma screening have never been so intuitive and inexpensive! Ideal for Occupational Medicine, Sport Medicine and Pediatric Medicine. Spirometry test interpretation and Quality Control Grade according to the latest Spirometry standards. Embedded temperature sensor for BTPS conversion.

- Measures the essential parameters for diagnostic spirometry: FEV6, FVC, FEV1, FEV1%, PEF, FEF2575, FIVC, Lung Age, VC, IVC.
- Flow/Volume loop and Volume/Time curve.
- Spirometry test interpretation.
- Temperature sensor for BTPS conversion.
- Inexpensive and easy to use
- Meets the requirements of integrated healthcare platforms and tablet applications.

#### Winspiro Light

#### Simplified Spirometry PC Software


Winspiro® light is an intuitive and efficient software, which comes standard with Minispir® light for complete diagnosis.



\*\*Data export also via email\*\*

**Pediatric Incentive Animations** 

### All spirometry functions in one screenshot.

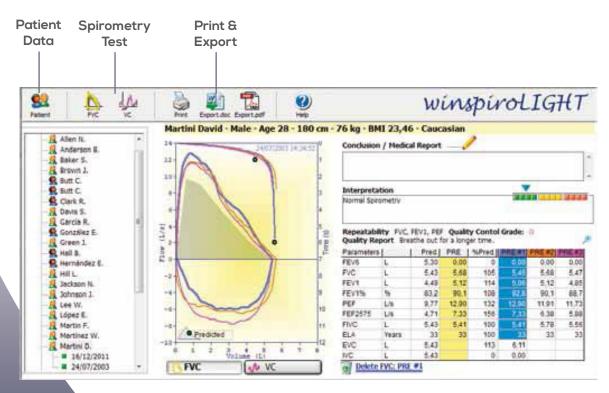

# **Feature Specifications:**

Temperature sensor: Dynamic resistance at 12 L/s:

semiconductor (0-45°C) <0.5 cmH2O/L/s

Flow sensor: Communication port:

bi-directional digital turbine USB

Flow range: Power Supply:

± 16 L/s line powered from USB port

Volume accuracy: Dimension:

± 3% or 50 mL 142x49.7x26 mm

Flow accuracy: Weight:

± 5% or 200 mL/s 65 gram (2.5 Oz)

## **Measured Parameters**

FVC, FEV1, FEV1%, FEV6, PEF, FEF25-75%, FIVC, Lung Age, VC, IVC